Tsurupica® / High-Resistivity Silicon

Transparent Optics for THz-wave

Tsurupica® is one of the best transparent material for THz-wave applications. It has advantages over existing materials such as Polyethylene and Silicon. Tsurupica shows high transmission and low loss on surface not only for THz-wave but for visible light.

Material	Tsurupica®	Polyethylene	Silicon	HR-Silicon
THz-wave transmission	Good	Good (Low freq)	Excellent (High freq)	Excellent
Visible transmission	Good	Opaque	No	No
Color	Transparent	White	Metallic	Metallic
Fresnel loss	Low	Low	High	High

FEATURES / SPECIFICATIONS

- Transmission range: 1~12THz
- Refractive index: 1.52 @THz-wave and 633 nm
- Visible laser is applicable as alignment guide.
- Employing Tsurupica® as a detector window, one can confirm the status of sensor element.
- Customized dimensions and finishing available upon request.

SURFACE FINISH

Choose from 3 types, as requirement of application.

- Type-RR: High-precision polish. Good transparency for visible light.
- Type-R: Semi-transparent polish. Transparent in visible region.
- Type-S: No polish. Opaque in visible.

Туре	RR	R	S
Polish	Precise	Easy	No
Visible transmission	Good	Available*1	Opaque
Shaping error	<15 um P-V*2	NA	NA
Surface roughness	<0.05 um	Intermediate	~2 um
Measurement data	Provided	No	No

- *1 Not specified.
- *2 <10 um for standard items

ORDERING INFO

For Spherical singlet: (P)-(S)-(A)-(B)-(R)

P: surface finish: R for easy-polish, S for no polish

S: shape: CX for positive singlet, BiCX for positive bi-convex, CC for negative singlet

A: diameter: 10~70 in mm

B: Focal length: in mm

R: rim: place N for no rim

ex. Spherical negative singlet, polished, diameter 50 mm and focal length -100 mm R-CC-50-100


Below items are standard and always in stock

- Positive aspherical singlet RR-CX-38.1-(B)-SPS, B=30, 50, 100
- Negative aspherical singlet RR-CC-38.1-(B)-SPS, B=40, 60
- Positive aspherical cylindrical RR-SIRI-100-SPS
- Slide glass RR-PP-26-76-SPS-5, 76 x 26 mm2 plane plate, 5 pcs/pack

Delivery 3~5 weeks ARO except for stock items. Special shape / dimensions available upon request.

For international orders, please ask Broadband Inc.

ask@bblaser.com / +81-3-5838-0082 ATTN: Kou Sakurai

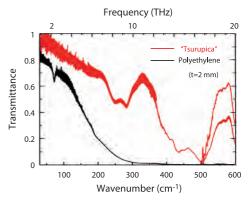

Tsurupica transmittance in THz region



Type-RR (with high-precision polish)



Type-S (no polish)


Tsurupica® is the result of cooperative development of PAX Inc. and Terahertzwave research group of RIKEN.

Also refer the Terahertz database on the RIKEN website for the

Also refer the Terahertz database on the RIKEN website for the datailed material information.

- Terahertzwave research group, RIKEN: http://www.riken.jp/en/research/labs/rap/thz_wave/
- The RIKEN Terahertz database: http://www.riken.jp/THzdatabase/

High-resistivity Silicon (HR-silicon) is pure material without dopant and contaminations, which is grown using a special technique. It shows considerably lower absorption than normal silicon especially in lower THz frequency region and at residual oxygen-related specific absorption peak at 1100 cm⁻¹.

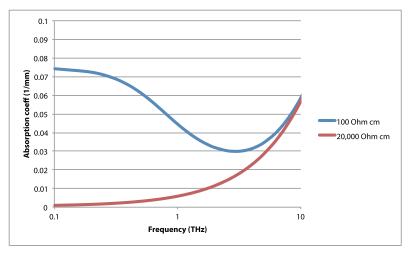

Absorption comparison between Low- and High-resistivity silicon in THz region (calculated result)

■ MATERIAL CHARACTERISTICS

HR-silicon shows slight absorption <3 THz while Low-res Si considerably high absorption, 36% at 1 THz for 10 mm-thick window.


Standard item

Material: Intrinsic silicon Resistivity: >20 kOhm cm

Orientation of ingot: (111) or (100)

Maximum dimensions*1: 3 inch dia x 50 mm


PRODUCTS



Thick blank (Window)




ATR module with Prism

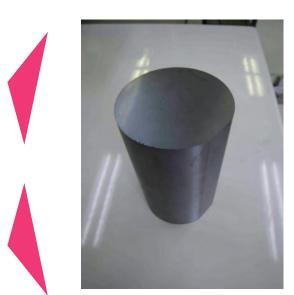

HR-silicon Ingot







Right angle prism



Ball lens





PAX, Inc.: Production / domestic sales of Tsurupica[®] Attn: Akihito KUDO 3-15-15 Jindaiji-Higashi-cho, Chofu, Tokyo 182-0012 Japan Phone / Fax: +81-42-486-7178 Mail: toiawase@papapapax.jp



BroadBand, Inc.: International sales of Tsurupica® Attn: Kou SAKURAI

1-8-5-2202 Harumi, Chuo-ku, Tokyo 104-0053 Japan Phone: +81-3-5534-8867 / Fax: +81-3-6740-8421

> Phone: +81-3-5838-0082 / Fax: +81-3-5838-0083 Mail: ask@bblaser.com

PHLUXi, Inc. Tokyo office

Mail: sales@phluxi.com Website: www.phluxi.com

^{*1} Larger size available upon request